


# CP2602



## Labels for Life.

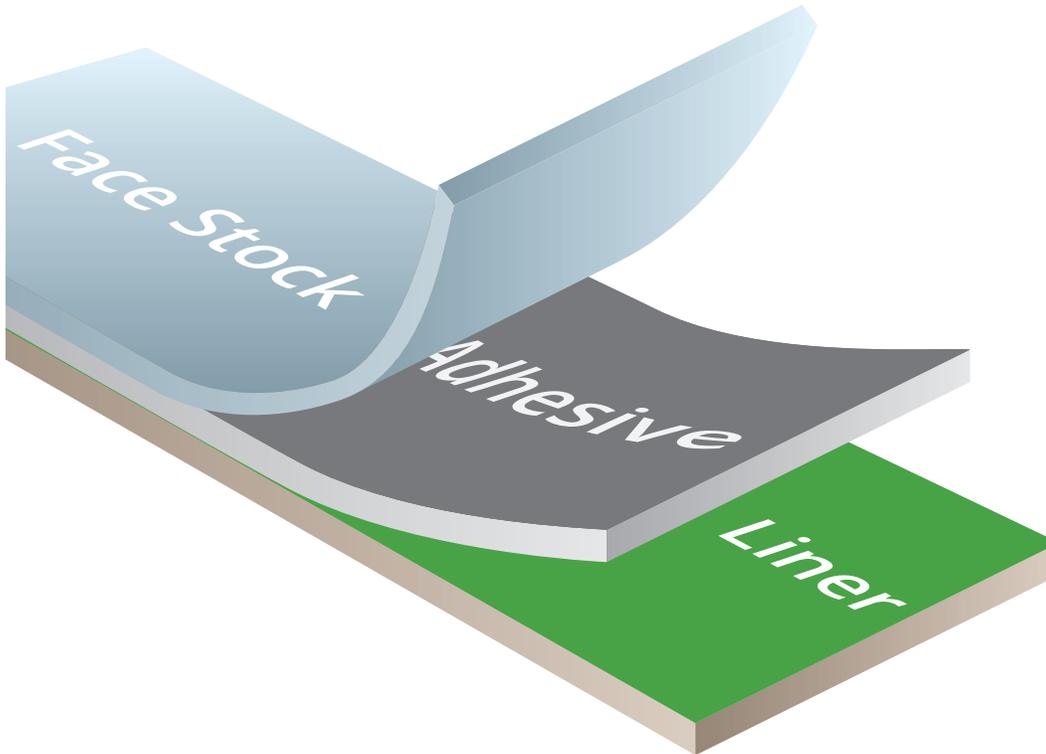

**Face Stock:** 2.0 mil gloss clear polypropylene that offers excellent resistance to smudging and optimal clarity after placement.

**Adhesive:** 0.8 mil high performance permanent acrylic adhesive designed to offer excellent clarity on the product it is applied to.

**Release Liner:** Available with a 1.5 mil (FL) polyester release liner designed to prevent blemishes from showing up in the adhesive.

## Gloss Clear Polypropylene Film

CP2602 is designed for UV and water based flexographic printing. Key features include indoor-only applications, high-performance blemish-preventing adhesive, optimal clarity and resistance to scratching and smudging. When used in combination with the recommended IDENTCO inks or ribbons, it will meet the most demanding durable labeling applications. Adhesive performance is determined by the substrate the label is applied to. Meets the requirements of FDA 21 CFR 175.105 for indirect food contact.

## Typical Industry Sectors

Automotive  
Electronics  
Industrial

# CP2602

Gloss Clear Polypropylene Film



Labels for Life.

 **Agency Recognitions**

 **Adhesion**

Polypropylene	32.0 oz/in	352.0 N/m
Paint	64.0 oz/in	704.0 N/m
Glass	54.4 oz/in	598.4 N/m

 **Material Caliper**

Face Stock	.0020"	50.8μ	Liner(polyester)	.0015"	38.1μ
Adhesive	.0008"	20.3μ	<b>Total Material</b>	<b>.0043"</b>	<b>109.2μ</b>

 **Exterior Durability**  
Recommended: Indoor use only.  
Testing is recommended in actual application.

 **Temperature Range**  
Service Temperature: -20 °F to 152 °F (-29 °C to 67 °C)  
Minimum Application Temperature: 50 °F (10 °C)

 **Shelf Life**  
Recommended Storage conditions : 40°F (5°C) - 80°F (26°C) and 40-70% RH.  
Shelf Life: 2 years @ recommended storage

 **Recommended Printing**  
Pre-Printing  
· UV and water based flexographic

 **Process Durability**  
It is recommended that customers test the material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 10/5/23

**UNITED STATES  
HEADQUARTERS**

28164 W. Concrete Drive,  
Ingleside, IL 60041 USA  
Phone: +1 (815) 385 - 0011  
Fax + (815) 385 - 0359

**MEXICO  
MONTERREY**

Carretera a Laredo KM 16.5  
Interior 14B Col. Moises Saenz  
Apodaca, Nuevo Leon CP 66613  
Phone: +51 (81) 8008 - 0438

**EUROPE  
GERMANY**

Güterbahnhofstraße 3-7  
63450 Hanau  
Phone: +49 (6181) 440 830 - 0  
Fax: +49 (6181) 440 830 - 99