

# CP3010




## Labels for Life.

**Face Stock:** 3.5 mil flexible matte white vinyl provides exceptional surface smoothness and conformability. The material offers excellent resistance to moderate temperatures and harsh abrasions.

**Adhesive:** 2.0 mil permanent pressure-sensitive acrylic adhesive provides excellent adhesion to low- and high-surface-energy plastics, painted metal, powder-coated paint, polycarbonates and fiberglass. The adhesive offers excellent resistance to high temperatures and harsh abrasions.

**Release Liner:** 50# kraft release liner.

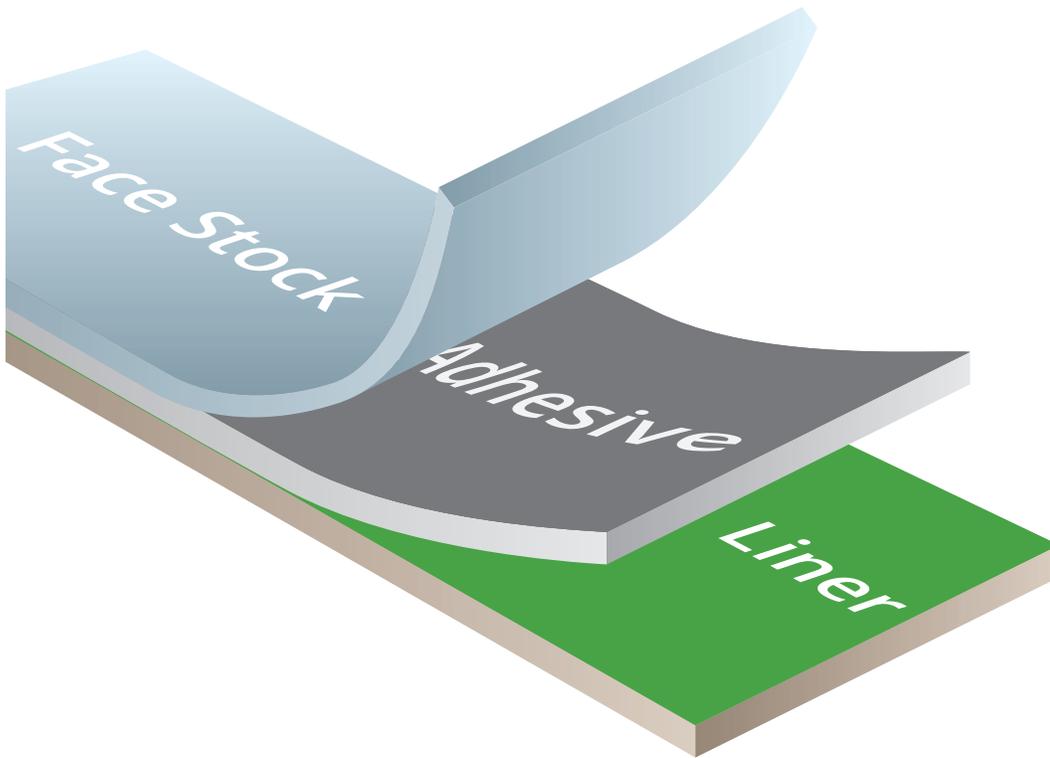

## Calendared White Vinyl Film

CP3010 is specifically designed to be UV Screen & Flexo printable and withstand the harsh environments of the Outdoor Power industry. Key features include: outdoor-power compliant, heavy-duty adhesive, excellent abrasion and heat resistance, conformable and it will not shrink. When used in combination with the recommended IDENTCO inks it will meet the most demanding durable labeling requirements needed to exceed Outdoor Power Equipment compliance regulations.

## Typical Industry Sectors

Outdoor Power Equipment  
Power Tools  
Appliances

# CP3010

Calendared White Vinyl Film



Labels for Life.

	<b>Agency Recognitions</b> UL-MH16225												
	<b>Adhesion</b> <table border="1"><tr><td>Stainless Steel</td><td>94 oz/in</td><td>1034 N/m</td></tr><tr><td>Acrylic</td><td>130 oz/in</td><td>1430 N/m</td></tr></table>	Stainless Steel	94 oz/in	1034 N/m	Acrylic	130 oz/in	1430 N/m						
Stainless Steel	94 oz/in	1034 N/m											
Acrylic	130 oz/in	1430 N/m											
	<b>Material Caliper</b> <table border="1"><tr><td>Face Stock</td><td>.0035"</td><td>88.9µ</td><td>Liner (kraft/FL)</td><td>.0031"</td><td>175.3µ</td></tr><tr><td>Adhesive</td><td>.0020"</td><td>50.8µ</td><td><b>Total Material</b></td><td><b>.0086"</b></td><td><b>218.4µ</b></td></tr></table>	Face Stock	.0035"	88.9µ	Liner (kraft/FL)	.0031"	175.3µ	Adhesive	.0020"	50.8µ	<b>Total Material</b>	<b>.0086"</b>	<b>218.4µ</b>
Face Stock	.0035"	88.9µ	Liner (kraft/FL)	.0031"	175.3µ								
Adhesive	.0020"	50.8µ	<b>Total Material</b>	<b>.0086"</b>	<b>218.4µ</b>								
	<b>Exterior Durability</b> Material Only: Indoor & 5 year outdoor durability Testing: 2000 hours in Xenon Arc												
	<b>Temperature Range</b> Service Temperature: -40°F to 176°F (-40°C to 80°C) Minimum Application Temperature: 50°F (10°C)												
	<b>Shelf Life</b> Recommended Storage conditions : 40°F (5°C) - 80°F (26°C) and 40-70% RH. Shelf Life: 2 years @ recommended storage												
	<b>Recommended Inks</b> UV Flexo UV Screen												
	<b>Process Durability</b> It is recommended that customers test this material in actual application to determine if the material meets all requirements.												

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 10/5/23

**UNITED STATES HEADQUARTERS**  
28164 W. Concrete Drive  
Ingleside, IL 60041  
Phone: +1 (815) 385 - 0011  
Fax +1 (815) 385 - 0359

**MEXICO MONTERREY**  
Carr. a Laredo Km. 16.5 Interior  
14B, Col. Moisés Sáenz, 66613  
Apodaca, Nuevo Leon  
Phone: +52 (81) 8008 - 0438

**GERMANY FRANKFURT**  
Güterbahnhofstrasse 3-7  
63450 Hanau  
Phone: +49 (6181) 440 830 - 0  
Fax: +49 (6181) 440 830 - 99