


CP8010



Labels for Life.

Face Stock: 10 mil
transparent velvet, LEXAN
8B35 polycarbonate film.

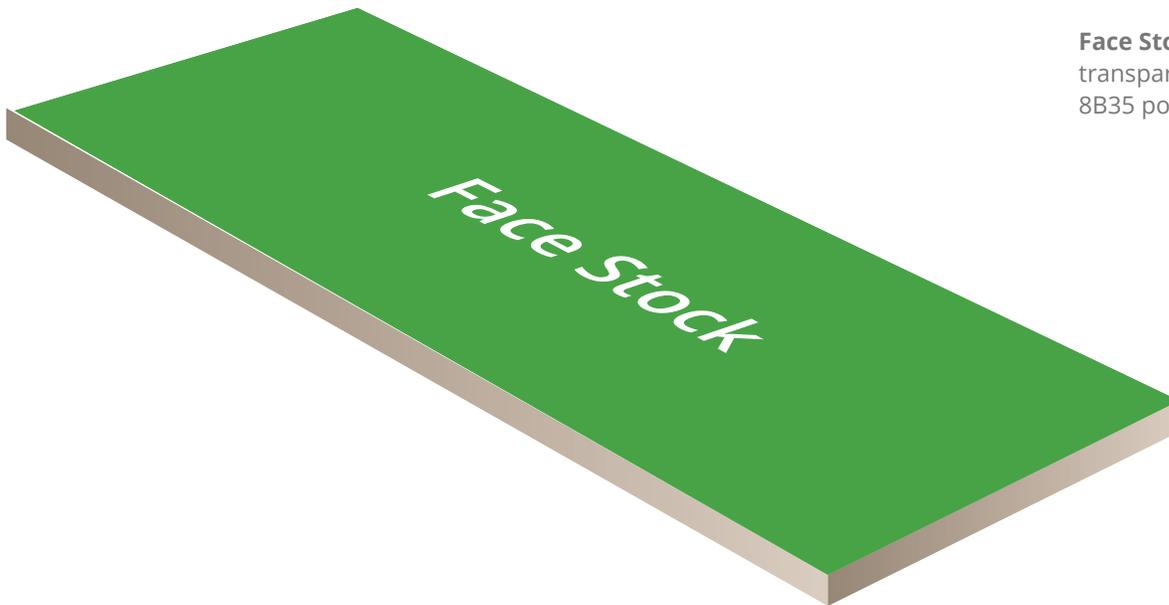

Transparent Polycarbonate Film

Key features include: Velvet finish, high temperature resistance, excellent dimensional stability. The velvet texture offers mar resistance and the transparent material can be used over light emitting devices (LEDs).

Typical Industry Sectors

Automotive
Electronics
Industrial
Medical

CP8010

Transparent Polycarbonate Film



Labels for Life.

Recognitions/Compliance

Adhesion

Tensile Strength		Ultimate	9000psi
Elongation at break	100-156%	Tensile Modulus	300,000psi
At yield	8500 psi		

Material Caliper

Face Stock	.010"	250μ
Total Material	.010"	250μ

Exterior Durability

Testing is recommended in actual application.

Temperature Range

Service Temperature: -40°F to 212°F (-40°C to 100°C)

Shelf Life

Recommended Storage conditions : 40°F (5°C) - 80°F (26°C) and 40-70% RH.
Shelf Life: 2 years @ recommended storage

Recommended Ribbon(s)

Non-printable

Process Durability

It is recommended that customers test this material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 10/5/23

UNITED STATES HEADQUARTERS

28164 W. Concrete Drive,
Ingleside, IL 60041 USA
Phone: +1 (815) 385 - 0011
Fax + (815) 385 - 0359

MEXICO MONTERREY

Carretera a Laredo KM 16.5
Bodega 14B Colonia Moisés Sáenz
Apodaca, Nuevo León CP 66613
Phone: +52 (81) 8008 - 0438

EUROPE GERMANY

Güterbahnhofstraße 3-7
63450 Hanau
Phone: +49 (6181) 440 830 - 0
Fax: +49 (6181) 440 830 - 99