

GlobaLabel® GL 1020


White Vinyl



Face Stock: 4 mil Flexible white Vinyl offers excellent abrasion and BS5609 Section 2 and 3 resistance.

Adhesive: 0.8 mil, General-purpose permanent adhesive. Designed for chemical drums, it provides excellent adhesion on painted steel and plastic drums.

Liner: 79 lb. Laser Liner.

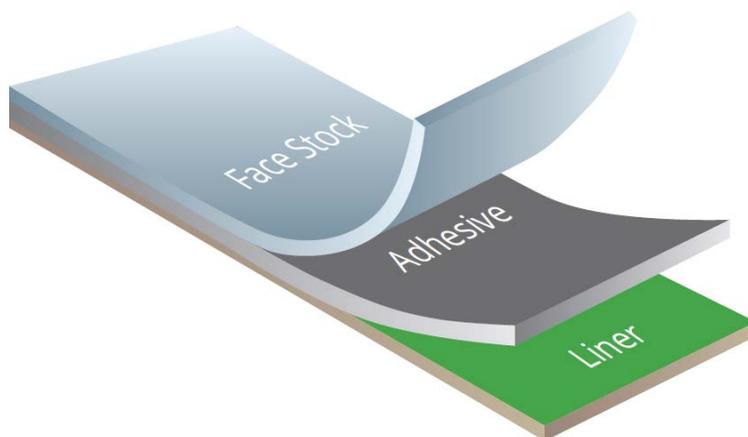

 <h3>Adhesion</h3> <p>Stainless Steel Loop-Tack 44 oz/in</p>	 <h3>Material Caliper</h3> <table border="1"> <tr> <td>Face Stock</td> <td>.0034"</td> <td>86.36</td> <td>μ</td> </tr> <tr> <td>Adhesive</td> <td>.0008"</td> <td>20.30</td> <td>μ</td> </tr> <tr> <td>Liner (kraft)</td> <td>.0046"</td> <td>116.84</td> <td>μ</td> </tr> <tr> <td>Total Material</td> <td>.0088"</td> <td>205.50</td> <td>μ</td> </tr> <tr> <td>Material Weight</td> <td></td> <td>275</td> <td>GSM</td> </tr> </table>	Face Stock	.0034"	86.36	μ	Adhesive	.0008"	20.30	μ	Liner (kraft)	.0046"	116.84	μ	Total Material	.0088"	205.50	μ	Material Weight		275	GSM	 <h3>Process Durability</h3> <p>It is recommended that customers test the material in actual application to determine if the material meets all requirements.</p>
Face Stock	.0034"	86.36	μ																			
Adhesive	.0008"	20.30	μ																			
Liner (kraft)	.0046"	116.84	μ																			
Total Material	.0088"	205.50	μ																			
Material Weight		275	GSM																			
 <h3>Exterior Durability</h3>	 <h3>Temperature Range</h3> <p>Service Temperature: -40°F to 300°F (-40°C to 149°C)</p> <p>Minimum Application Temperature: 0°F (12°C)</p>	 <h3>Shelf Life</h3> <p>Recommended Storage conditions : 60°F (15°C) - 72°F (21°C) and 50% RH.</p> <p>Shelf Life: 1 years @ recommended storage</p>																				
 <h3>Chemical Resistance</h3>	 <h3>Agency Recognitions</h3> <p>BS5609:1986, Section 2 – Marine Laboratory Performance of Label Base Materials. BS5609 Section 3 Image - Durability using specific color label printers.</p>	 <h3>Recommended Printing</h3> <p>Laser Printers</p>																				

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only. They shall not be relied upon by Reliance Label Solution customers for designs and specifications or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact RLS for further information. Revised 07/25/24.