


L213(P)



Labels for Life.

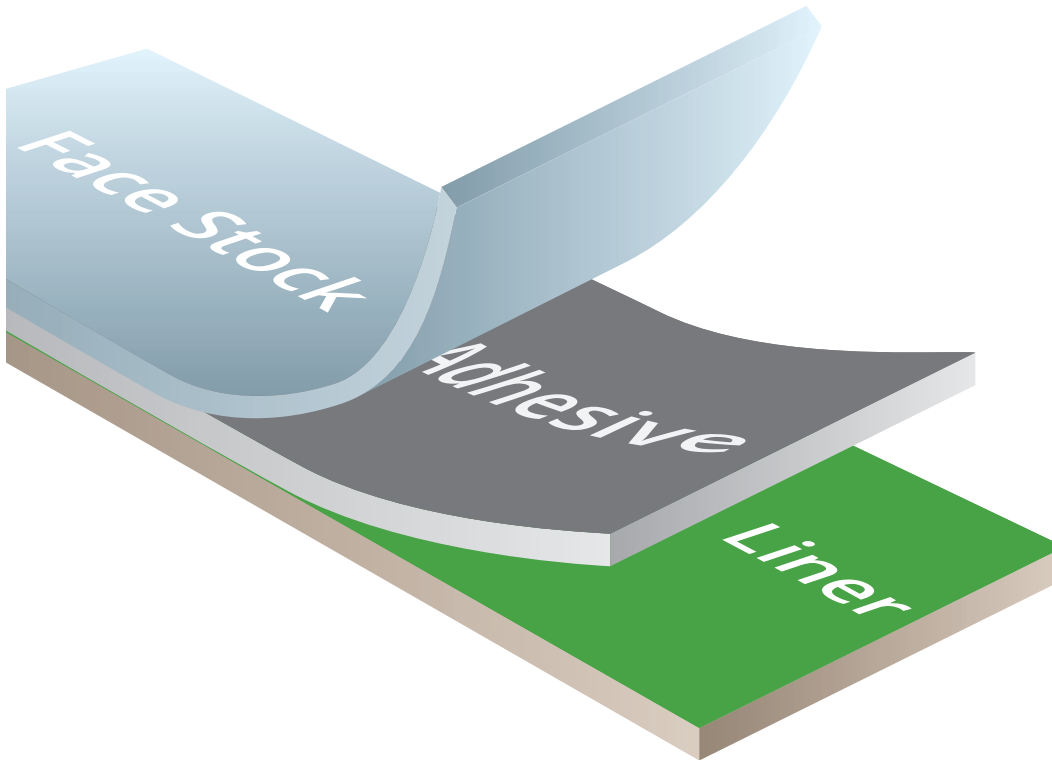

Face Stock: 2 mil topcoated platinum polyester offers excellent resistance to harsh chemicals and abrasion. The material will not shrink and is recommended for thermal transfer printing and flexographic printing.

Adhesive: 0.8 mil high performance permanent pressure sensitive adhesive.

Release Liner: 55# kraft release liner.

Printable Platinum Polyester Film

L213(P) is designed for flexographic printing with the option for thermal transfer printing of variable information. Key features include: high performance adhesive, chrome appearance, ideal for marking nameplates and topside of through hole printed circuit boards, and excellent resistance to solvents and scratching. When used in combination with the recommended IDENTCO inks & ribbons, it meets the most demanding durable labeling requirements.

Typical Industry Sectors

Automotive
Electronics
Industrial

L213(P)

Printable Platinum
Polyester Film



Labels for Life.



Agency Recognitions



Adhesion

Stainless Steel	67 oz/in	737 N/m	Polypropylene	56 oz/in	616 N/m
Polycarbonate	61 oz/in	671 N/m	Glass	71 oz/in	781 N/m



Material Caliper

Face Stock	.0020"	50.8μ	Liner(kraft)	.0032"	81.3μ
Adhesive	.0008"	20.3μ	Total Material	.0060"	152.4μ



Exterior Durability

Recommended : Indoor use



Temperature Range

Service Temperature: -40°F to 300°F (-40°C to 149°C)
Minimum Application Temperature: 50°F (10°C)



Shelf Life

Recommended Storage conditions : 40°F (5°C) - 80°F (26°C) and 40-70% RH.
Shelf Life: 2 years @ recommended storage



Recommended Ribbons

Thermal Transfer Printing
• Resin ribbons

Flexographic Printing
• Flexographic inks



Process Durability

It is recommended that customers test the material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 10/5/23

UNITED STATES HEADQUARTERS

28164 W. Concrete Drive
Ingleside, IL 60041
Phone: +1 (815) 385 - 0011
Fax +1 (815) 385 - 0359

MEXICO MONTERREY

Carr. a Laredo Km. 16.5 Interior
14B, Col. Moisés Sáenz, 66613
Apodaca, Nuevo Leon
Phone: +52 (81) 8008 - 0438

GERMANY FRANKFURT

Güterbahnhofstrasse 3-7
63450 Hanau
Phone: +49 (6181) 440 830 - 0
Fax: +49 (6181) 440 830 - 99