

L214(P)




Labels for Life.

Face Stock: 2 mil topcoated Platinum polyester offers excellent resistance to harsh chemicals and abrasion. The material will not shrink and is recommended for flexo and thermal transfer printing.

Adhesive: 1.4-1.5 mil high performance permanent pressure sensitive acrylic adhesive offering excellent scratch and smudge resistance. Adhesive excellent for use on LSE plastics & slightly textured surfaces.

Release Liner: 3.2 mil semi bleached kraft liner that has been coated on the backside with Quilon to prevent label pick-off.

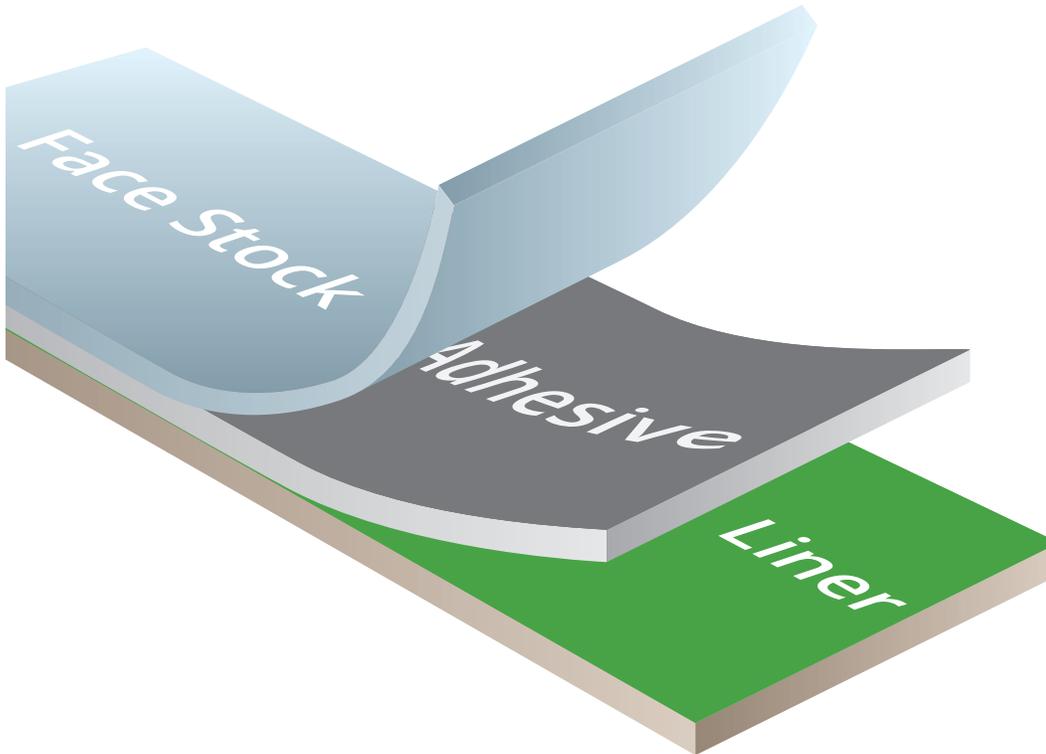

Printable Platinum Polyester Film

L214(P) is designed for flexographic printing with the option of on demand thermal transfer printing. Key features include: indoor and outdoor applications, extra thick adhesive for textured or rough surfaces, will not shrink and excellent smudge, solvent, and abrasion resistance. When used in combination with the recommended IDENTCO inks and ribbons, it will meet the most demanding durable labeling requirements.

Typical Industry Sectors

Automotive
Electronics
Industrial

L214(P)

Printable Platinum
Polyester Film



Labels for Life.

Agency Recognitions

	Adhesion					
	Stainless Steel	94 oz/in	1034 N/m	Polypropylene	86 oz/in	946 N/m
	Acrylic	90 oz/in	990 N/m	Glass	93 oz/in	1023 N/m

	Material Caliper					
	Face Stock	.0020"	50.8 μ	Liner(kraft)	.0032"	81.3 μ
	Adhesive	.0014"-.0015	35.6-38.1 μ	Total Material	.0060-.0067"	167.6-170.2μ

Exterior Durability

Material Only: 2 Years

Temperature Range

Service Temperature: -40°F to 300°F (-40°C to 149°C)
Minimum Application Temperature: 50°F (10°C)

Shelf Life

Recommended Storage conditions : 40°F (5°C) - 80°F (26°C) and 40-70% RH.
Shelf Life: 2 years @ recommended storage

Recommended Ribbons

Thermal Transfer Printing
• Resin ribbons

Process Durability

It is recommended that customers test the material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 10/5/23

**UNITED STATES
HEADQUARTERS**
28164 W. Concrete Drive
Ingleside, IL 60041
Phone: +1 (815) 385 - 0011
Fax +1 (815) 385 - 0359

**MEXICO
MONTERREY**
Carr. a Laredo Km. 16.5 Interior
14B, Col. Moisés Sáenz, 66613
Apodaca, Nuevo Leon
Phone: +52 (81) 8008 - 0438

**GERMANY
FRANKFURT**
Güterbahnhofstrasse 3-7
63450 Hanau
Phone: +49 (6181) 440 830 - 0
Fax: +49 (6181) 440 830 - 99