

OL1001(P)




Labels for Life.

Face Stock: 1.0 mil non-printable matte clear polyester overlaminating film offers excellent resistance to scratches and abrasion. This material is designed to not shrink. It cannot be used in a fan fold application.

Adhesive: 0.9- 1.0 mil general purpose permanent acrylic adhesive offering excellent scratch and smudge resistance.

Release Liner: 1.0 mil polyester liner designed to offer excellent performance.

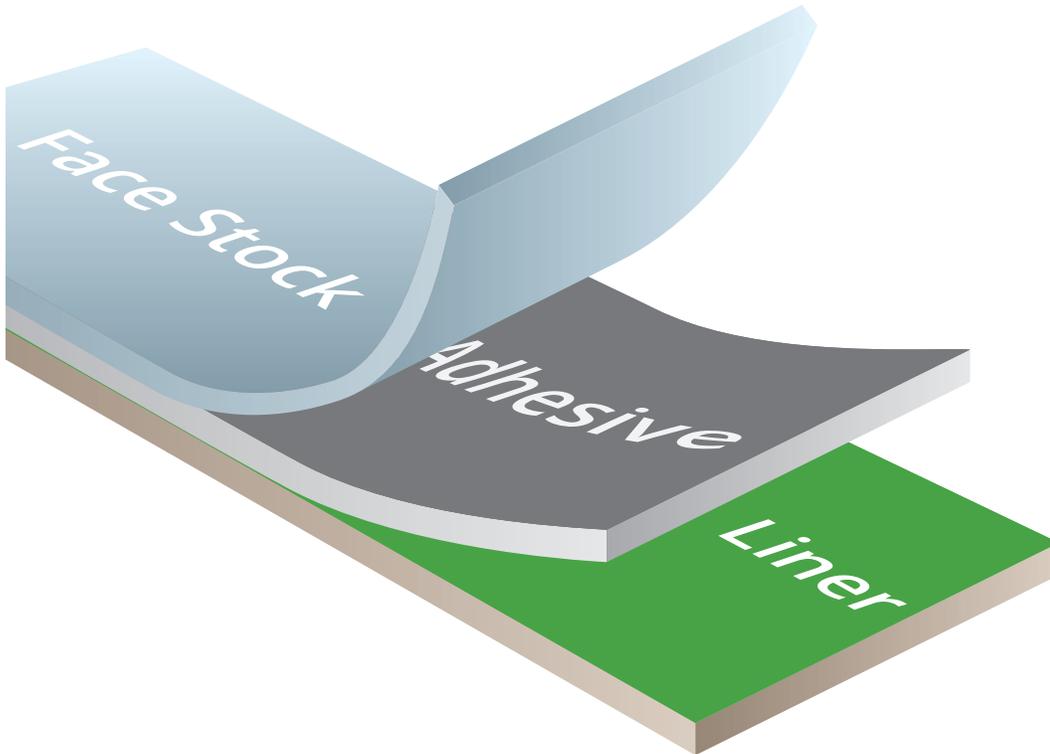

Matte Clear Polyester Overlaminating Film

OL1001(P) is designed to be a non-printable matte film. Key features include: indoor only applications, will not shrink, can be used as an overlaminate, and excellent smudge and scratch resistance. When used in combination with the recommended IDENTCO materials, it will meet the most demanding durable labeling requirements.

Typical Applications

- Shipping Labels
- Bags
- Corrugated Cardboard Packages

Typical Industry Sectors

- Automotive
- Electronics
- Industrial



www.identco.com

OL1001(P)

Matte Clear Polyester
Overlaminating Film



Labels for Life.

 **Agency Recognitions**
UL & CSA with TT704(P) & TT734(P)

 **Adhesion**

Stainless Steel	35.0 oz/in	385 N/m
Polypropylene	18.5 oz/in	204 N/m
Acrylic 45.0 oz/in	495 N/m	

 **Material Caliper**

Face Stock	.0010"	25.4μ	Liner(polyester)	.0010"	25.4μ
Adhesive	.0009" / .0010"	22.9/25.5μ	Total Material	.0029" / .0030"	73.66/76.2μ

 **Exterior Durability**
Recommended: Indoor and outdoor durability

 **Temperature Range**
Service Temperature: -40°F to 300°F (-40°C to 149°C)
Minimum Application Temperature: 50°F (10°C)

 **Shelf Life**
Recommended Storage: 45-90°F (7-32°C) 20-75% R.H.
Shelf Life: 2 years @ recommended storage

 **Recommended Printing**
Non-printable

 **Chemical Resistance**
Material was applied to stainless steel panels (dwell 24 hours) and immersed in chemicals for 4 hours and evaluated immediately after removal.

Chemical Agents

Tide	No visual change	.5 mm Edge Penetration
Oil	No visual change	0 mm Edge Penetration
Water	No visual change	0 mm Edge Penetration
Isopropyl Alcohol	No visual change	0 mm Edge Penetration
409 Cleaner	No visual change	.01 mm Edge Penetration
Toluene	No visual change	6.4 mm Edge Penetration

 **Process Durability**
It is recommended that customers test the material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 11/1/2016

UNITED STATES HEADQUARTERS
28164 W. Concrete Drive
Ingleside, IL 60041
Phone: +1 (815) 385 - 0011
Fax +1 (815) 385 - 0359

MEXICO MONTERREY
Carr. a Laredo Km. 16.5 Interior
14B, Col. Moisés Sáenz, 66613
Apodaca, Nuevo Leon
Phone: +52 (81) 8008 - 0438

GERMANY FRANKFURT
Güterbahnhofstrasse 3-7
63450 Hanau
Phone: +49 (6181) 440 830 - 0
Fax: +49 (6181) 440 830 - 99

PRC HONG KONG
Unit 1708, 17/F, 9 Wing Hong St.
Cheung Sha Wan, Kowloon
Phone: +852 2959 2156
Fax: +852 2959 2019

MALAYSIA PENANG
Suite 163E, Level 16, Room 1602
Hunza Tower Gurney Paragon
Jalan Kelawai, Georgetown
10250 Penang
Phone: +6012 466 - 0866