

# TT337 Matte Clear Vinyl





Labels for Life.

**Face Stock:** 3.2 mil matte clear vinyl offers excellent resistance to moisture. The material is highly conformable and is used for self-laminating wire and cable identification labels.

**Adhesive:** Clear permanent acrylic adhesive-offering excellent wet-out characteristics, good UV stability and high performance applications.

**Release Liner:** 50# kraft liner.

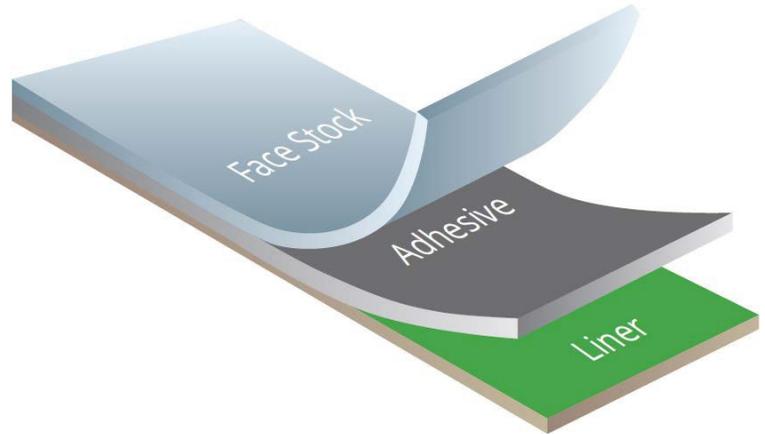

 <h3>Adhesion</h3> <p>Stainless - 30 min @73°F: 56.0 oz/in Stainless - 24 hr @73°F:d 89.6 oz/in</p>	 <h3>Material Caliper</h3> <table border="1"> <tr> <td>Face Stock</td> <td>.0032"</td> <td>81.2 μ</td> </tr> <tr> <td>Adhesive</td> <td>.0005"</td> <td>12.7 μ</td> </tr> <tr> <td>Liner (kraft)</td> <td>.0032"</td> <td>81.1 μ</td> </tr> <tr> <td>Total Material</td> <td>.0069"</td> <td>175.1 μ</td> </tr> </table>	Face Stock	.0032"	81.2 μ	Adhesive	.0005"	12.7 μ	Liner (kraft)	.0032"	81.1 μ	Total Material	.0069"	175.1 μ	 <h3>Process Durability</h3> <p>It is recommended that customers test the material in actual application to determine if the material meets all requirements.</p>
Face Stock	.0032"	81.2 μ												
Adhesive	.0005"	12.7 μ												
Liner (kraft)	.0032"	81.1 μ												
Total Material	.0069"	175.1 μ												
 <h3>Exterior Durability</h3> <p>Recommended: Indoor and Outdoor use. Weather-ability: 31 days (750 hours) per ASTM G155 in Xenon lamp chamber with daylight filters at 120-minute cycles consisting of 102 minutes of light exposure and 18 minutes exposure to water spray and light, with no visible effect.</p>	 <h3>Temperature Range</h3> <p>Service Temperature: -20°F to 176°F (-28°C to 80°C) Minimum Application Temperature: -20°F (-28°C)</p>	 <h3>Shelf Life</h3> <p>Recommended Storage conditions: 40°F (5°C) - 80°F (26°C) and 40-70% RH Shelf Life: 1 years @ recommended storage</p>												
 <h3>Chemical Resistance</h3> <p>Testing can be completed upon customer request</p>	 <h3>Agency Recognitions</h3> <p>UL approved. MH16873 MH16225</p>	 <h3>Recommended Printing</h3> <p>IDENTCO Thermo-Transfer Ribbons TTR TTRR-A TTRR-G</p>												

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only. They shall not be relied upon by IDENTCO customers for designs and specifications or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information—revised 08/08/24.

UNITED STATES HEADQUARTERS  
28164 W. Concrete Drive  
Ingleside, IL 60041  
Phone: +1 (815) 385 - 0011

MEXICO MONTERREY  
Carr. a Laredo Km. 16.5 Interior  
14B, Col. Moisés Sáenz, 66613  
Apodaca, Nuevo Leon  
Phone: +52 (81) 8008 - 0438

GERMANY FRANKFURT  
Güterbahnhofstrasse 3-7  
63450 Hanau  
Phone: +49 (6181) 440 830 - 0



[identco.com](http://identco.com)