


TT517



Labels for Life.

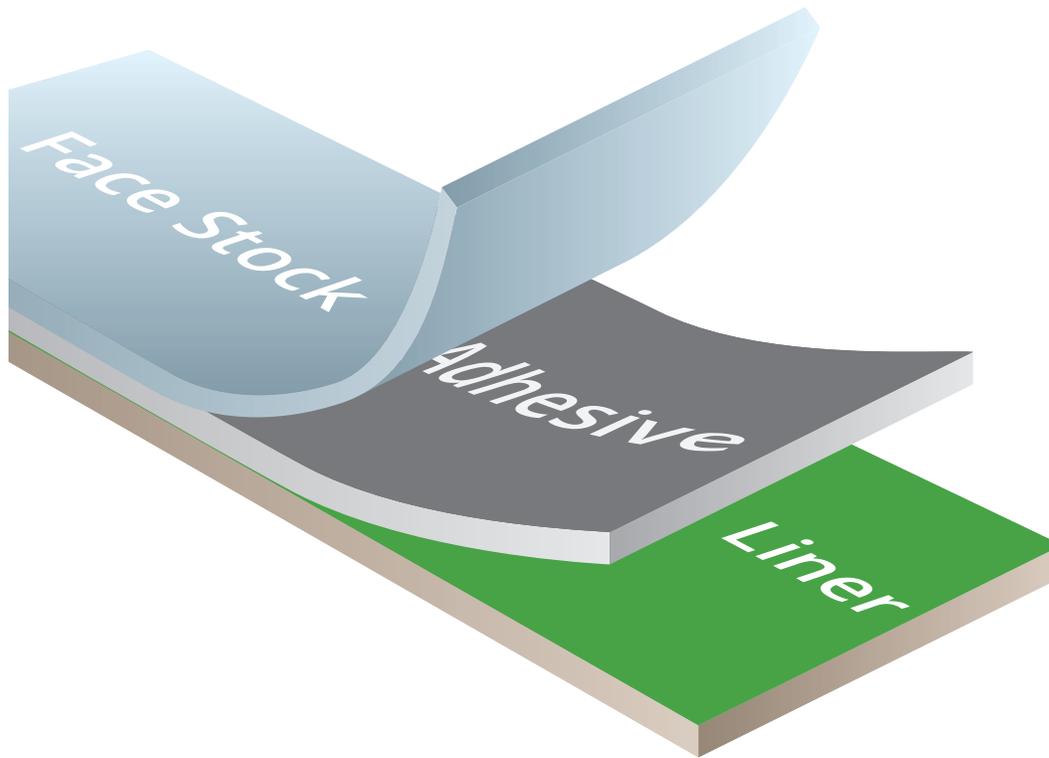

Face Stock: 60# clay coated, bright, blue-white, super calendered paper.

Adhesive: a general purpose permanent rubber based adhesive featuring high initial tack and ultimate adhesion. Suitable for applications where FDA Compliance with: Title 21, Section 175.105 of the Code of Federal Regulations (21 CFR 175.105).

Release Liner: 40#CK is a bleached, calendered kraft stock featuring high internal strength, toughness, and tear resistance. Used primarily for roll-to-roll label applications.

Semi-Gloss White Paper

TT517 is a bright, blue-white, 60# clay coated, super calendered paper. It is designed to bridge the gap between low- and high-end process printing, up to 175 line screen. This sheet prints well with water-based Flexo, UV Flexo, and UV Letterpress inks. It has improved smoothness while maintaining strength for good converting and dispensing.

Typical Industry Sectors

Automotive
Electronics
Industrial

TT517

Semi-Gloss White Paper



Labels for Life.

Agency Recognitions

Adhesion						
Rigid HDPE	68.8 oz/in	756.80 N/m	Polypropylene	72 oz/in	792 N/m	
Stainless Steel	99.2 oz/in	1091.2 N/m				

Material Caliper						
Face Stock	0.0031"	78.74μ	Liner	0.00247"	62.74μ	
Adhesive	.0005"	12.7μ	Total Material	.0064"	162.6μ	

Exterior Durability

Recommended: Indoor use only

Temperature Range

Service Temperature: -65°F to 200°F (-53°C to 93°C)
Minimum Application Temperature: 40°F(4°C)

Shelf Life

Recommended Storage conditions : 40°F (5°C) - 80°F (26°C) and 40–70% RH.
Shelf Life: 1 year @ recommended storage

Recommended Printing

Pre-printing
• UV flexographic inks

Thermal Transfer Printing
• TTR Series

Process Durability

It is recommended that customers test this material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 10/5/23

UNITED STATES HEADQUARTERS

28164 W. Concrete Drive
Ingleside, IL 60041
Phone: +1 (815) 385 - 0011
Fax +1 (815) 385 - 0359

MEXICO MONTERREY

Carr. a Laredo Km. 16.5 Interior
14B, Col. Moisés Sáenz, 66613
Apodaca, Nuevo Leon
Phone: +52 (81) 8008 - 0438

GERMANY FRANKFURT

Güterbahnhofstrasse 3-7
63450 Hanau
Phone: +49 (6181) 440 830 - 0
Fax: +49 (6181) 440 830 - 99