

# TT533

## Thermal Transfer Dull White Paper





Labels for Life.

**Face Stock:** 2.9 mil top coated dull white paper offers exceptional print quality and clarity when printed with the recommended ribbon.

**Adhesive:** 1.4 mil heavy duty rubber-based adhesive offers excellent adhesion on flat, semi-textured and semi-curved surfaces.

**Liner:** 40# paper release liner designed for optimal performance.

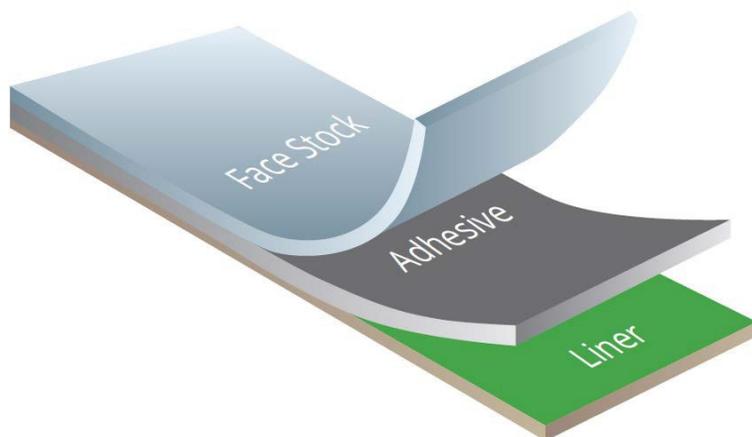

 <h3>Adhesion</h3> <table border="1"> <tr> <td>Stainless Steel</td> <td>48 oz/in</td> </tr> <tr> <td>HDPE</td> <td>32 oz/in</td> </tr> <tr> <td>Wood</td> <td>27 oz/in</td> </tr> </table>	Stainless Steel	48 oz/in	HDPE	32 oz/in	Wood	27 oz/in	 <h3>Material Caliper</h3> <table border="1"> <tr> <td>Face Stock</td> <td>.0029"</td> <td>73.6 μ</td> </tr> <tr> <td>Adhesive</td> <td>.0014"</td> <td>35.6 μ</td> </tr> <tr> <td>Liner (kraft)</td> <td>.0025"</td> <td>63.5 μ</td> </tr> <tr> <td>Total Material</td> <td>.0068"</td> <td>172.7 μ</td> </tr> </table>	Face Stock	.0029"	73.6 μ	Adhesive	.0014"	35.6 μ	Liner (kraft)	.0025"	63.5 μ	Total Material	.0068"	172.7 μ	 <h3>Process Durability</h3> <p>It is recommended that customers test the material in actual application to determine if the material meets all requirements.</p>
Stainless Steel	48 oz/in																			
HDPE	32 oz/in																			
Wood	27 oz/in																			
Face Stock	.0029"	73.6 μ																		
Adhesive	.0014"	35.6 μ																		
Liner (kraft)	.0025"	63.5 μ																		
Total Material	.0068"	172.7 μ																		
 <h3>Exterior Durability</h3> <p>Recommended: Indoor use only</p>	 <h3>Temperature Range</h3> <p>Service Temperature: -65°F to 165°F (-25°C to 71°C)</p> <p>Minimum Application Temperature: 25°F (-3°C)</p>	 <h3>Shelf Life</h3> <p>Recommended Storage conditions:</p> <p>40°F (5°C) - 80°F (26°C) and 40-70% RH</p> <p>Shelf Life: 1 years @ recommended storage</p>																		
 <h3>Chemical Resistance</h3> <p>Testing can be completed upon customer request</p>	 <h3>Agency Recognitions</h3> <p>UL-MH16873 (PGJ12)</p>	 <h3>Recommended Printing</h3> <p>IDENTCO Thermo-Transfer Ribbons TTR TTRR-A</p>																		

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only. They shall not be relied upon by IDENTCO customers for designs and specifications or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information—revised 02/01/24.



