

# TT601(P)




## Labels for Life.

**Face Stock:** 2.3 mil topcoated gloss white polypropylene offers excellent resistance to harsh chemicals, scratches, smudges and abrasion. The material is semi-conformable. It is ideal for applications where the heat requirement of polyester is not required.

**Adhesive:** 0.8-0.9 mil high performance emulsion acrylic adhesive offering excellent chemical and abrasion resistance.

**Release Liner:** 50# kraft liner specifically designed to offer excellent performance.

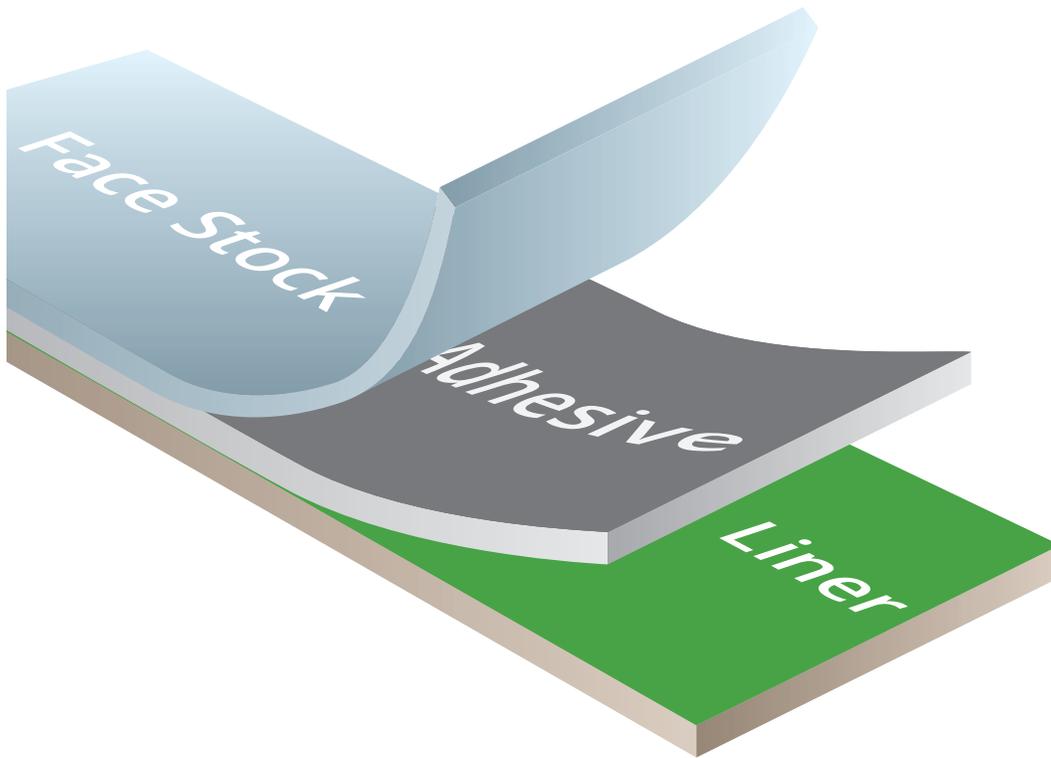

## Gloss White Polypropylene Film

TT601(P) is designed for flexographic printing with the option of on demand thermal transfer printing of variable information. Key features include: indoor only applications, and excellent smudge, abrasion, scratch and solvent resistance. When used in combination with the recommended IDENTCO inks or ribbon, it will meet the most demanding durable labeling requirements. This material is not recommended for low surface energy (LSE) surfaces.

## Typical Applications

- Rating Plates
- Nameplates
- Industrial Barcodes

## Typical Industry Sectors

- Automotive
- Electronics
- Industrial



[www.identco.com](http://www.identco.com)

# TT601(P)

Gloss White Polypropylene Film



**Labels for Life.**

## Agency Recognitions

## Adhesion

Stainless Steel	43 oz/in	473 N/m	Glass	44 oz/in	484 N/m
Acrylic	50 oz/in	550 N/m	Polypropylene	13 oz/in	143 N/m

## Material Caliper

Face Stock	.0023"	58.4μ	Liner	.0031"	78.7μ
Adhesive	.0008/.0009"	20.3/22.9μ	<b>Total Material</b>	<b>.0062/.0063"</b>	<b>157.5/160.0μ</b>

## Exterior Durability

Recommended: Indoor use only

## Temperature Range

Service Temperature: -40°F to 176°F (-40°C to 80°C)  
Minimum Application Temperature: 50°F (10°C)

## Shelf Life

Recommended Storage: 45-90 °F (7-32 °C) 20-75% R.H.  
Shelf Life: 2 years @ recommended storage

## Recommended Printing

Flexographic Printing  
Thermal Transfer Printing  
TTRR-B • TTRR-D Ribbons

## Process Durability

It is recommended that customers test this material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 11/1/2016

### UNITED STATES HEADQUARTERS

28164 W. Concrete Drive  
Ingleside, IL 60041  
Phone: +1 (815) 385 - 0011  
Fax +1 (815) 385 - 0359

### MEXICO MONTERREY

Carr. a Laredo Km. 16.5 Interior  
14B, Col. Moisés Sáenz, 66613  
Apodaca, Nuevo Leon  
Phone: +52 (81) 8008 - 0438

### GERMANY FRANKFURT

Güterbahnhofstrasse 3-7  
63450 Hanau  
Phone: +49 (6181) 440 830 - 0  
Fax: +49 (6181) 440 830 - 99

### PRC HONG KONG

Unit 1708, 17/F, 9 Wing Hong St.  
Cheung Sha Wan, Kowloon  
Phone: +852 2959 2156  
Fax: +852 2959 2019

### MALAYSIA PENANG

Suite 163E, Level 16, Room 1602  
Hunza Tower Gurney Paragon  
Jalan Kelawei, Georgetown  
10250 Penang  
Phone: +6012 466 - 0866