

# TT730

## Thermal Transfer Gloss Platinum Silver Polyester Film




Labels for Life.

**Face Stock:** 2 mil top coated gloss silver polyester offers excellent abrasion and harsh chemical resistance. The material will not shrink.

**Adhesive:** 0.9 mil high performance permanent acrylic adhesive offering superior harsh chemical and abrasion resistance.

**Liner:** 50# kraft liner or 1.5 mil polyester liner (TT7301) designed to offer excellent performance for both manual and automatic application

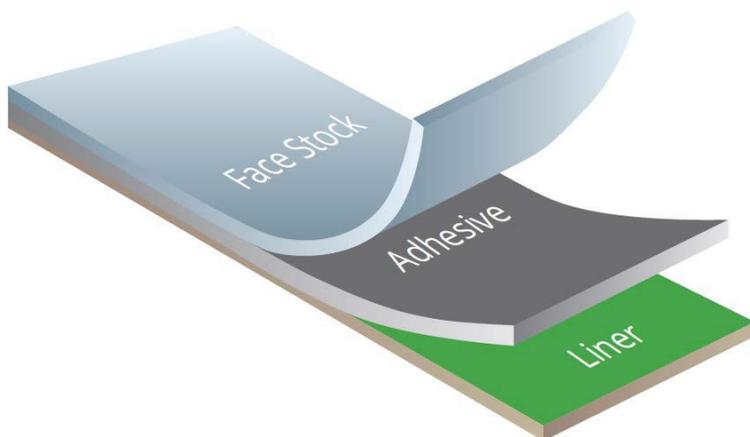

### Adhesion

Stainless Steel	55 oz/in
Polycarbonate	58 oz/in
Polypropylene	12 oz/in
Acrylic	68 oz/in
Glass	56 oz/in



### Material Caliper

Face Stock	.0020"	58.8 μ
Adhesive	.0009"	22.9 μ
Liner (kraft)	.0031"	78.7 μ
Total Material	.0060"	152.4 μ



### Process Durability

It is recommended that customers test the material in actual application to determine if the material meets all requirements.



### Exterior Durability

Material w/ TTRR-D Ribbon: 2 Years



### Temperature Range

Service Temperature: -40°F to 302°F (-40°C to 150°C)

Minimum Application Temperature: 50°F (10°C)



### Shelf Life

Recommended Storage conditions:

40°F (5°C) - 80°F (26°C) and 40-70% RH

Shelf Life: 2 years @ recommended storage



### Chemical Resistance

Chemical Agents Passed:

Household Cleaners	Mild Acid
Oil @250°F (121 °C)	Mineral Spirits
Water	Toluene
Isopropyl Alcohol	



### Agency Recognitions

UL-MH16873/MH16225

CSA-089882\_L\_000



### Recommended Printing

IDENTCO Thermo-Transfer Ribbons  
TTRR-B, TTRR-D, TTRR-V

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only. They shall not be relied upon by IDENTCO customers for designs and specifications or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information—revised 02/01/24.

