


# TT740



## Labels for Life.

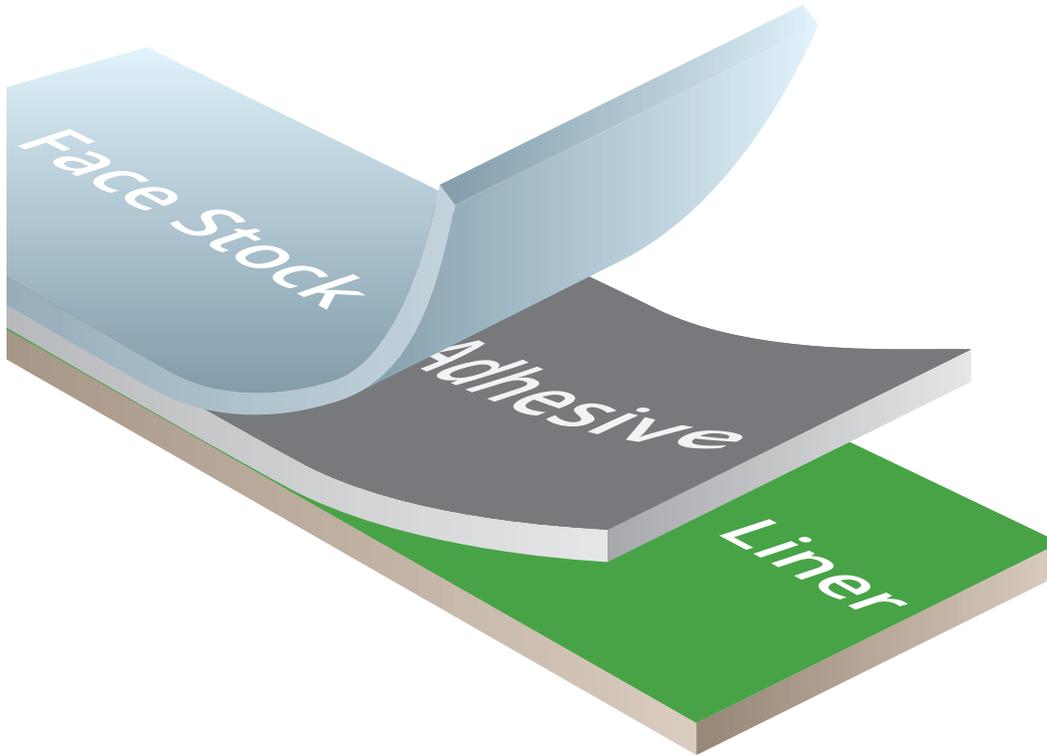

**Face Stock:** 3.3 mil topcoated matte platinum polyester offers excellent resistance to harsh chemicals and abrasion. The material is specifically designed not to shrink.

**Adhesive:** 0.8 mil high performance permanent acrylic adhesive offering superior harsh chemical and abrasion resistance.

**Release Liner:** 55# kraft liner designed to offer excellent performance for both manual and automatic application.

## Thermal Transfer Matte Platinum Polyester Film

TT740 is designed for UV flexographic with the option of thermal transfer printing of variable information. **Key features include:** indoor and outdoor applications and excellent smudge, solvent and abrasion resistance. When used in combination with the recommended Identco ink or ribbon, it will meet the most demanding durable labeling requirements. Preheating of the label surface will enhance the performance.

## Typical Industry Sectors

- Automotive
- Electronics
- Industrial

# TT740

Thermal Transfer Matte Platinum Polyester Film



Labels for Life.

**Agency Recognitions**

UL-MH16873.MH16225  
CSA-089882\_L\_000

**Adhesion**

Stainless Steel	50 oz/in	550 N/m	Polypropylene	18 oz/in	1198 N/m
Polycarbonate	49 oz/in	530 N/m			

**Material Caliper**

Face Stock	.0033"	83.8μ	Liner (kraft/FL)	.0032"	81.3μ
Adhesive	.0008"	20.3μ	<b>Total Material</b>	<b>.0073"</b>	<b>185.4μ</b>

**Exterior Durability**

Material Only: 2 Years  
Material w/ TTRR-D Ribbon: 2 Years

**Temperature Range**

Service Temperature: -40°F to 302°F (-40°C to 150°C)  
Minimum Application Temperature: 50°F (10°C)

**Shelf Life**

Recommended Storage conditions : 40°F (5°C) - 80°F (26°C) and 40-70% RH.  
Shelf Life: 2 years @ recommended storage

**Recommended Ribbons**

Pre-printing	Thermal Transfer Printing	
UV flexographic inks	TTRR-B	TTRR-D

**Chemical Resistance**

Chemical Agents	Material Only (w/o printing)	Printing (TTRR Ribbon)	Printing (Cotton swab rub)
Household Cleaners	Passed	Passed	Passed
Oil @250 °F (121 °C)	Slight Change	Passed	Passed
Water	Passed	Passed	Passed
Isopropyl Alcohol	Passed	Passed	Passed

**Process Durability**

It is recommended that customers test the material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 10/5/23

**UNITED STATES HEADQUARTERS**  
28164 W. Concrete Drive  
Ingleside, IL 60041  
Phone: +1 (815) 385 - 0011  
Fax +1 (815) 385 - 0359

**MEXICO MONTERREY**  
Carr. a Laredo Km. 16.5 Interior  
14B, Col. Moisés Sáenz, 66613  
Apodaca, Nuevo Leon  
Phone: +52 (81) 8008 - 0438

**GERMANY FRANKFURT**  
Güterbahnhofstrasse 3-7  
63450 Hanau  
Phone: +49 (6181) 440 830 - 0  
Fax: +49 (6181) 440 830 - 99