

TT757

Thermal Transfer Printable Gloss White Polyester Film




Labels for Life.

Face Stock: 2.0 mil top-coated gloss white polyester offers excellent abrasion and harsh chemical resistance.

Adhesive: 1.0 mil high-performance permanent acrylic adhesive that works well at high temperatures and with harsh chemicals. The adhesive adheres well to many different surfaces, such as metals and HSE and LSE plastics.

Liner: 50# Liner (Layflat)

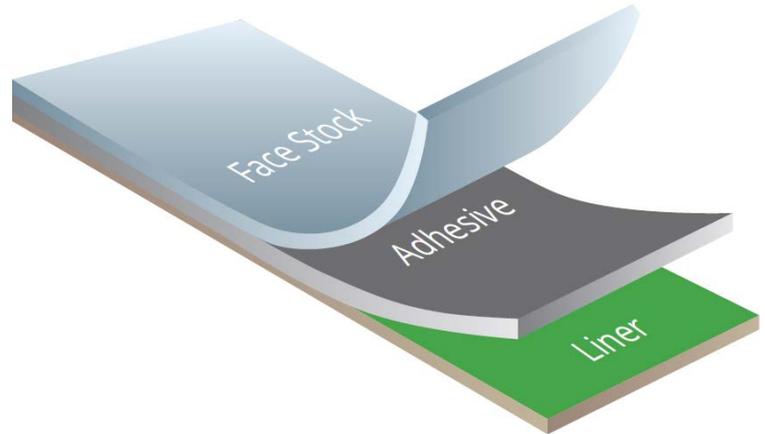

 <h3>Adhesion</h3> <table border="1"> <tr> <td>Stainless Steel</td> <td>97.5 oz/in</td> </tr> <tr> <td>Aluminum</td> <td>109 oz/in</td> </tr> <tr> <td>Polypropylene</td> <td>77 oz/in</td> </tr> <tr> <td>Smooth ABS</td> <td>99 oz/in</td> </tr> <tr> <td>Tack</td> <td>3.5 lb/in</td> </tr> </table>	Stainless Steel	97.5 oz/in	Aluminum	109 oz/in	Polypropylene	77 oz/in	Smooth ABS	99 oz/in	Tack	3.5 lb/in	 <h3>Material Caliper</h3> <table border="1"> <tr> <td>Face Stock</td> <td>.0020"</td> <td>50.8 μ</td> </tr> <tr> <td>Adhesive</td> <td>.0010"</td> <td>25.4 μ</td> </tr> <tr> <td>Liner</td> <td>.0032"</td> <td>81.2 μ</td> </tr> <tr> <td>Total Material</td> <td>.0062</td> <td>157.4 μ</td> </tr> </table>	Face Stock	.0020"	50.8 μ	Adhesive	.0010"	25.4 μ	Liner	.0032"	81.2 μ	Total Material	.0062	157.4 μ	 <h3>Process Durability</h3> <p>It is recommended that customers test the material in actual application to determine if the material meets all requirements.</p>
Stainless Steel	97.5 oz/in																							
Aluminum	109 oz/in																							
Polypropylene	77 oz/in																							
Smooth ABS	99 oz/in																							
Tack	3.5 lb/in																							
Face Stock	.0020"	50.8 μ																						
Adhesive	.0010"	25.4 μ																						
Liner	.0032"	81.2 μ																						
Total Material	.0062	157.4 μ																						
 <h3>Exterior Durability</h3> <p>Indoor and Outdoor use</p>	 <h3>Temperature Range</h3> <p>Service Temperature: -40°F to 300°F (-40°C to 148°C)</p> <p>Minimum Application Temperature: 41°F (5°C)</p>	 <h3>Shelf Life</h3> <p>Recommended Storage conditions : 40°F (5°C) - 80°F (26°C) and 40-70% RH.</p> <p>Shelf Life: 2 years @ recommended storage</p>																						
 <h3>Chemical Resistance</h3> <p>Testing can be completed upon customer request</p>	 <h3>Agency Recognitions</h3>	 <h3>Recommended Printing</h3> <p>Thermal Transfer Printable TTRR B, CR, D and V</p>																						

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 07/30/25.

UNITED STATES HEADQUARTERS
28164 W. Concrete Drive
Ingleside, IL 60041
Phone: +1 (815) 385 - 0011

MEXICO MONTERREY
Carr. a Laredo Km. 16.5 Interior
14B, Col. Moisés Sáenz, 66613
Apodaca, Nuevo Leon
Phone: +52 (81) 8008 - 0438

GERMANY FRANKFURT
Güterbahnhofstrasse 3-7
63450 Hanau
Phone: +49 (6181) 440 830 - 0



identco.com