


# TT PAPER



**Labels for Life.**

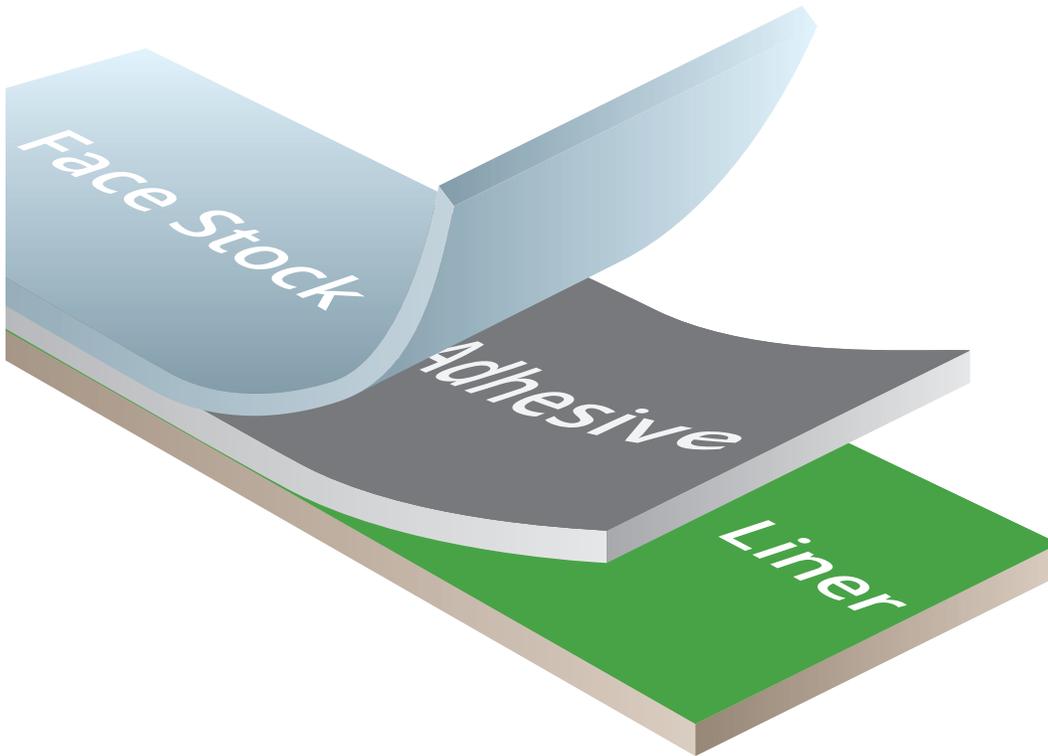

**Face Stock:** 3.2 mil topcoated premium coated ultra smooth thermal transfer paper offers exceptional print quality and clarity from the ultra smooth topcoat.

**Adhesive:** 0.6 mil high performance general permanent adhesive offering an all temperature adhesive designed for low and high temperatures.

**Release Liner:** 40# kraft liner designed to offer excellent performance for manual application.

## Thermal Transfer Paper

TT Paper is designed for on demand thermal transfer printing of variable information. **Key features include:** indoor only applications, removability, ultra smooth topcoat and an all temperature adhesive for low heat and high heat applications. The material meets FDA 175.105.

## Typical Industry Sectors

Automotive  
Electronics  
Industrial

	<b>Agency Recognitions</b>					
	<b>Adhesion</b>					
	Corrugated	20 oz/in	220 N/m			
	Rigid HDPE	34 oz/in	374 N/m			
	Treated LDPE	29 oz/in	319N/m			
	<b>Material Caliper</b>					
	Face Stock	.0032"	81.3μ	Liner (kraft)	.0025"	63.5μ
	Adhesive	.0006"	15.2μ	<b>Total Material</b>	<b>.0063"</b>	<b>160.0μ</b>
	<b>Exterior Durability</b>					
	Recommended: Indoor use only					
	<b>Temperature Range</b>					
	Service Temperature: -40 °F to 200 °F (-40 °C to 93 °C)					
	Minimum Application Temperature: 25 °F (4 °C)					
	<b>Shelf Life</b>					
	Recommended Storage: 70 °F (21 °C) 40-50% R.H.					
	Shelf Life: 1 year @ recommended storage					
	<b>Recommended Ribbons</b>					
	TTR					
	TTRR-A					
	<b>Chemical Resistance</b>					
	Testing can be completed upon request.					
	<b>Process Durability</b>					
	It is recommended that customers test the material in actual application to determine if the material meets all requirements.					

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 10/5/23

**UNITED STATES HEADQUARTERS**  
 28164 W. Concrete Drive  
 Ingleside, IL 60041  
 Phone: +1 (815) 385 - 0011  
 Fax +1 (815) 385 - 0359

**MEXICO MONTERREY**  
 Carr. a Laredo Km. 16.5 Interior  
 14B, Col. Moisés Sáenz, 66613  
 Apodaca, Nuevo Leon  
 Phone: +52 (81) 8008 - 0438

**GERMANY FRANKFURT**  
 Güterbahnhofstrasse 3-7  
 63450 Hanau  
 Phone: +49 (6181) 440 830 - 0  
 Fax: +49 (6181) 440 830 - 99